


Noise from the A-post

Applying oil

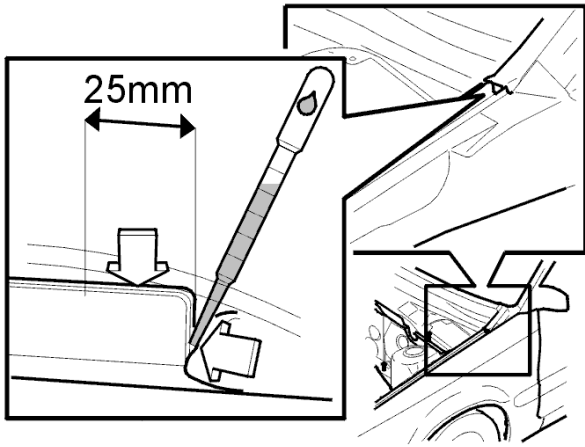

Apply oil between the two inner vertical panels in the rear corner of the end plate of the windscreen wiper well. Use a pipette (P/N 9511029) to apply the oil.

The oil should run down between the panels. On certain cars a small hole must be made in the sealant between the plates for the oil to run down.

Also apply the oil above the panel edge from the rear of the edge and approximately 25 mm forwards.

Morgis - Volvoforum.no

Background:

A creaking noise at the left A post of certain cars may be heard under acceleration and braking. The noise comes from the point where three vertical panels are joined at the windscreen wiper well end plate. The creaking can decrease or disappear completely if oil is applied between the inner panels. The oil should be applied with an eyedropper.

The method is suitable for cars within the following chassis number range. Cars outside the chassis number range have been modified in production.

Affected cars:

Car model	Factory code	Chassis number
850 (4-drs)/S70	VTM=1	78000-507472
850 (4-drs)/S70	VEC=2	100400-503232
850 (5-drs)/V70	VEC=2	12000-459169

Materials:

Oil	3 ml	1161398-1
Eyedropper	1	9511029-2

Noise from left A-post