



Chafe protection for the sill trim panel

Marking for the chafe protection

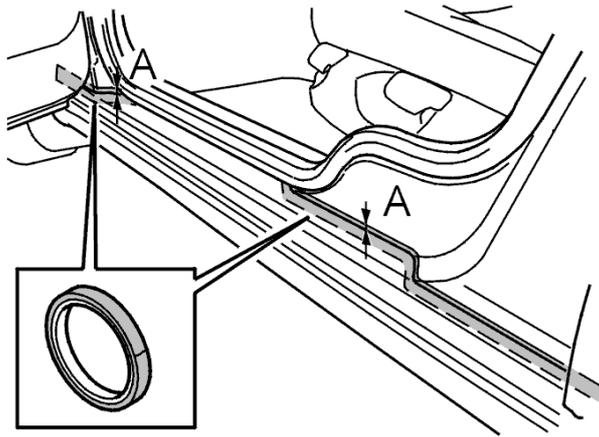


Position the sill trim panel against the door sill in its installed position. Do not secure the sill trim panel. Mark approximately 2 mm above the door sill where the sill trim panel is positioned against the door sill using paper tape (see the shaded sections as illustrated). Remove the sill trim panel.

Installing the chafe protection tape at the A-post

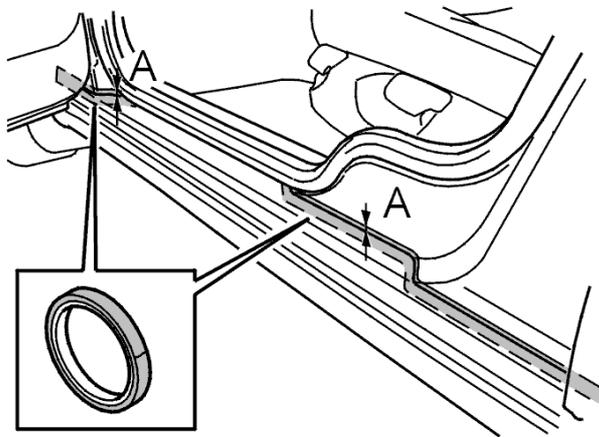

Install chafe protection tape, P/N 9126160, on the door sill (A) at the A-post. Position the chafe protection tape below the paper tape so that the top edge is positioned against the paper tape. Remove the paper tape.

Installing the chafe protection tape at the B-post

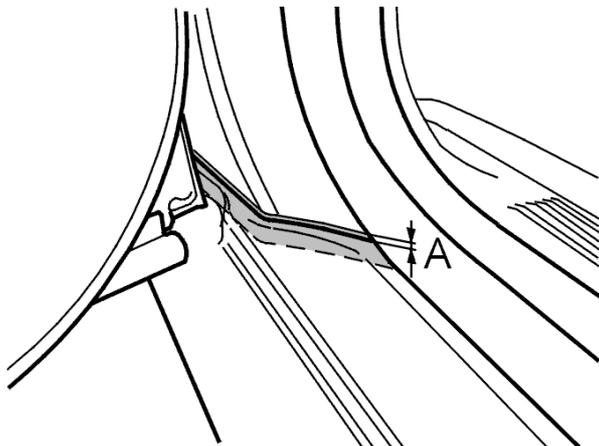

Install the chafe protection tape at the B-post using the same method as for the A-post.

Installing the chafe protection tape at the C-post

Install the chafe protection tape at the C-post using the same method as for the A-post. Install the sill trim panel. Check that tape is positioned in the places where the sill trim panel is positioned against the painted surface.

