


## Seal, tailgate handle

### Install rubber seal on the tailgate handle

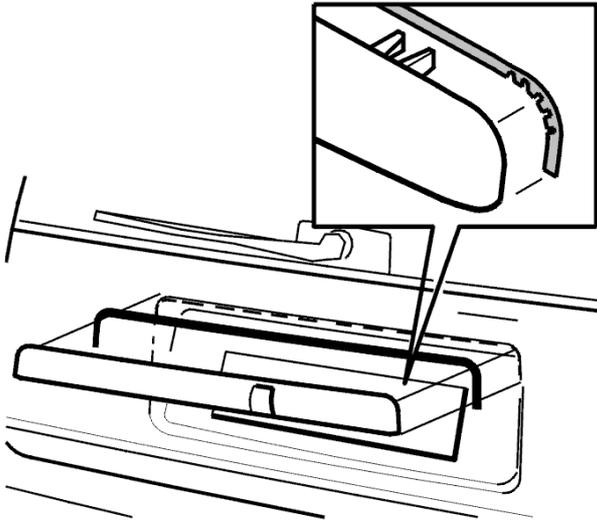

Clean the tailgate handle edge where the rubber strip is to be installed.

Use Cleaner H, P/N 1161436-9.

Secure the rubber strip at one corner.

Pull off a little of the backing from the rubber strip and secure the strip so that it goes round the curved part of the tailgate handle.

Pull off a little of the backing from the other end of the rubber strip and secure the strip so that it goes round the curved part of the tailgate handle.

It is important that the strip is secured at both corners before it is secured in the middle. This strip was originally intended for the S70 tailgate handle and therefore it is slightly shorter than the tailgate handle on the 855.

Remove the remaining backing and secure the strip on the tailgate handle.

Install the tailgate handle on the tailgate according to the method [Replacing tailgate handle](#) Section 8(82-86, 88) Interior, exterior 850 1992-1996 Section E23.